



System-wide Call Appearance (SWCA) Features Card

Avaya Business Communications Manager Release 6.0

Document Status: **Standard**

Document Number: **NN40010-101**

Document Version: **04.02**

Date: **October 2010**

© 2010 Avaya Inc.
All Rights Reserved.

Notices

While reasonable efforts have been made to ensure that the information in this document is complete and accurate at the time of printing, Avaya assumes no liability for any errors. Avaya reserves the right to make changes and corrections to the information in this document without the obligation to notify any person or organization of such changes.

Documentation disclaimer

Avaya shall not be responsible for any modifications, additions, or deletions to the original published version of this documentation unless such modifications, additions, or deletions were performed by Avaya. End User agree to indemnify and hold harmless Avaya, Avaya's agents, servants and employees against all claims, lawsuits, demands and judgments arising out of, or in connection with, subsequent modifications, additions or deletions to this documentation, to the extent made by End User.

Link disclaimer

Avaya is not responsible for the contents or reliability of any linked Web sites referenced within this site or documentation(s) provided by Avaya. Avaya is not responsible for the accuracy of any information, statement or content provided on these sites and does not necessarily endorse the products, services, or information described or offered within them. Avaya does not guarantee that these links will work all the time and has no control over the availability of the linked pages.

Warranty

Avaya provides a limited warranty on this product. Refer to your sales agreement to establish the terms of the limited warranty. In addition, Avaya's standard warranty language, as well as information regarding support for this product, while under warranty, is available to Avaya customers and other parties through the Avaya Support Web site: <http://www.avaya.com/support>

Please note that if you acquired the product from an authorized reseller, the warranty is provided to you by said reseller and not by Avaya.

Licenses

THE SOFTWARE LICENSE TERMS AVAILABLE ON THE AVAYA WEBSITE, [HTTP://SUPPORT.AVAYA.COM/LICENSEINFO/](http://SUPPORT.AVAYA.COM/LICENSEINFO/) ARE APPLICABLE TO ANYONE WHO DOWNLOADS, USES AND/OR INSTALLS AVAYA SOFTWARE, PURCHASED FROM AVAYA INC., ANY AVAYA AFFILIATE, OR AN AUTHORIZED AVAYA RESELLER (AS APPLICABLE) UNDER A COMMERCIAL AGREEMENT WITH AVAYA OR AN AUTHORIZED AVAYA RESELLER. UNLESS OTHERWISE AGREED TO BY AVAYA IN WRITING, AVAYA DOES NOT EXTEND THIS LICENSE IF THE SOFTWARE WAS OBTAINED FROM ANYONE OTHER THAN AVAYA, AN AVAYA AFFILIATE OR AN AVAYA AUTHORIZED RESELLER, AND AVAYA RESERVES THE RIGHT TO TAKE LEGAL ACTION AGAINST YOU AND ANYONE ELSE USING OR SELLING THE SOFTWARE WITHOUT A LICENSE. BY INSTALLING, DOWNLOADING OR USING THE SOFTWARE, OR AUTHORIZING OTHERS TO DO SO, YOU, ON BEHALF OF YOURSELF AND THE ENTITY FOR WHOM YOU ARE INSTALLING, DOWNLOADING OR USING THE SOFTWARE (HEREINAFTER REFERRED TO INTERCHANGEABLY AS "YOU" AND "END USER"), AGREE TO THESE TERMS AND CONDITIONS AND CREATE A BINDING CONTRACT BETWEEN YOU AND AVAYA INC. OR THE APPLICABLE AVAYA AFFILIATE ("AVAYA").

Copyright

Except where expressly stated otherwise, no use should be made of the Documentation(s) and Product(s) provided by Avaya. All content in this documentation(s) and the product(s) provided by Avaya including the selection, arrangement and design of the content is owned either by Avaya or its licensors and is protected by copyright and other intellectual property laws including the sui generis rights relating to the protection of databases. You may not modify, copy, reproduce, republish, upload, post, transmit or distribute in any way any content, in whole or in part, including any code and software. Unauthorized reproduction, transmission, dissemination, storage, and/or use without the express written consent of Avaya can be a criminal, as well as a civil offense under the applicable law.

Third Party Components

Certain software programs or portions thereof included in the Product may contain software distributed under third party agreements ("Third Party Components"), which may contain terms that expand or limit rights to use certain portions of the Product ("Third Party Terms"). Information regarding distributed Linux OS source code (for those Products that have distributed the Linux OS source code), and identifying the copyright holders of the Third Party Components and the Third Party Terms that apply to them is available on the Avaya Support Web site: <http://support.avaya.com/Copyright>.

Trademarks

The trademarks, logos and service marks ("Marks") displayed in this site, the documentation(s) and product(s) provided by Avaya are the registered or unregistered Marks of Avaya, its affiliates, or other third parties. Users are not permitted to use such Marks without prior written consent from Avaya or such third party which may own the Mark. Nothing contained in this site, the documentation(s) and product(s) should be construed as granting, by implication, estoppel, or otherwise, any license or right in and to the Marks without the express written permission of Avaya or the applicable third party. Avaya is a registered trademark of Avaya Inc. All non-Avaya trademarks are the property of their respective owners.

Downloading documents

For the most current versions of documentation, see the Avaya Support. Web site: <http://www.avaya.com/support>

Contact Avaya Support

Avaya provides a telephone number for you to use to report problems or to ask questions about your product. The support telephone number is 1-800-242-2121 in the United States. For additional support telephone numbers, see the Avaya Web site: <http://www.avaya.com/support>

About System-wide Call Appearance (SWCA) keys

Use the System-wide Call Appearance (SWCA) feature to park incoming and outgoing calls on your Avaya Business Communications Manager (Avaya BCM) 6.0 system and, at the same time, provide call appearance of the call to a group of telephones. Using this feature frees the line used by the call and allows another user to pick up the call at any telephone that has been assigned the same SWCA keys.



Note: Your telephone must have an available intercom key to pick up SWCA calls.

Label your telephone keys to provide information about the code used to program each key (see Table 1).

Table 1: SWCA keys labels

Table 2: Indicate the label for your SWCA keys

Assigning SWCA keys

The diagram shows a telephone keypad layout. On the left side, there are eight keys: 'Line 1', 'Line 2', 'SWCA1', 'SWCA2', 'SWCA3', and three unlabeled keys. On the right side, there are eight keys: 'SWCA4', 'SWCA', 'SWCA6', and three unlabeled keys. The bottom two keys on the right are labeled 'Intercom'. A central vertical bar separates the two columns.

If possible, assign the same set of buttons to the same SWCA user codes for all telephones in the call group.

You can name the keys anything, but it helps to have some reference to the SWCA code that is saved on the key.

To find out which code has been assigned to a button, use Button Inquiry (**FEATURE *0**).

Indicate the label for your SWCA keys

Table 2:

Telephone key #	SWCA code
	FEATURE *521
	FEATURE *522
	FEATURE *523
	FEATURE *524
	FEATURE *525
	FEATURE *526
	FEATURE *527
	FEATURE *528
	FEATURE *529
	FEATURE *530
	FEATURE *531
	FEATURE *532
	FEATURE *533
	FEATURE *534
	FEATURE *535

Adding SWCA keys to your telephone

Your system administrator can assign SWCA keys to a group of telephones.

Also, users can assign these keys on their own telephones:

- 1 Enter **FEATURE *3**
- 2 Select a memory button with an indicator
- 3 Enter a SWCA code (**FEATURE *521** to **FEATURE*536**)

Managing calls using SWCA keys

Receiving a call and assigning it to a SWCA key

Your system administrator can tell you how your system works.

The system may be programmed the following ways:

- 1 An incoming call is associated with a SWCA key in one of three ways:
 - manually, for the life of the call
 - manually, while parked
 - automatically, for the life of the call
- 2 When you press **HOLD**, the call parks on an available SWCA key.


Answering a second call: When the system answers a second call, the original call is automatically parked on an available SWCA key. For this to occur, your system must be set to Full Autohold (FEATURE 73). Note that to turn Full Autohold off, enter FEATURE 73 again.

You can also do one of the following to park the call:

- 1 While the call is active, you enter the SWCA code that corresponds to the key where you want to park the call. Refer to [“Adding SWCA keys to your telephone” on page 4](#).
- 2 While the call is active, you enter FEATURE *520 , to search for the next available SWCA code (assigned to your telephone).
 - If the system finds an available code, the call is associated with the code. Press Hold or the assigned SWCA key to park the call.
 - If no code is available, the call remains active on your telephone, only. Put the call on Hold until a SWCA key becomes available.
 - If the call was already associated with a SWCA code (for the life of the call), the call is reparked on that code.

Using SWCA without programming keys

It is not necessary to have SWCA keys programmed on your telephone to unpark a SWCA call. You can pick up a call parked on a SWCA key by entering the SWCA code (**FEATURE *521** to **FEATURE *536**) that was used to park the call. However, this requires the person who parked the call to use other features to indicate where the call is parked, such as Page (**FEATURE 60**), Voice call (**FEATURE 66**), or Messaging (**FEATURE 1**).

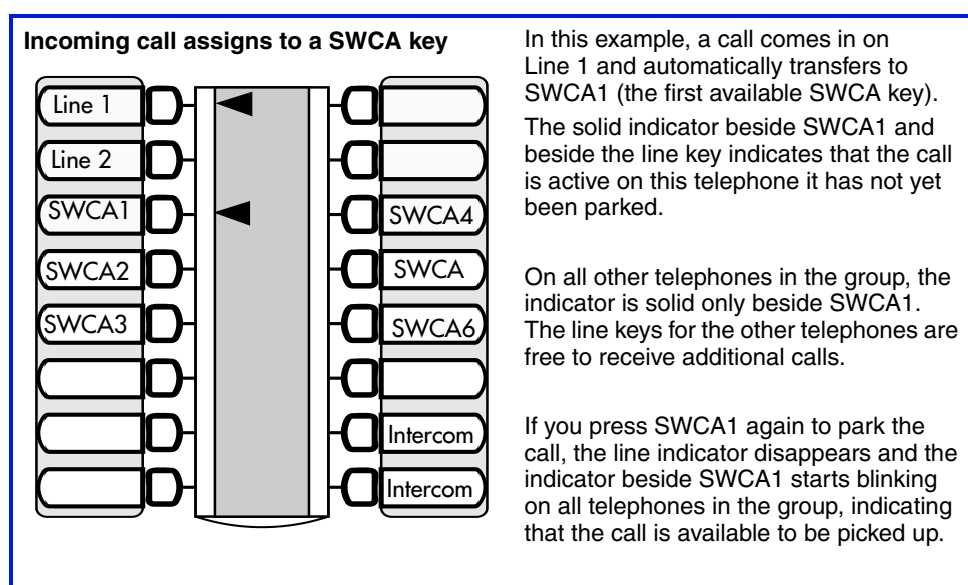

Using Hold with SWCA keys

If a call does not automatically park on a SWCA key when you press **HOLD**, it means the call is parked only on your telephone on the line it came in on. To make the call available to the group, you need to release the call (press **HOLD**), then press an available SWCA key. The call parks on that SWCA key and the line the call came in on becomes available.

When **Invoke SWCA parking by HOLD** is set to **YES**, any call put on hold will automatically be parked to SWCA. This includes calls automatically put on hold while invoking **F986** to transfer a call to voicemail, or other features like conference etc. To disable this feature set **Invoke SWCA parking by HOLD** to **NO**.

Handling temporarily parked calls

You can configure your system so that calls parked on SWCA keys release the SWCA key once someone picks up the call. In this case, if the person who picks up the call wants to repark it, they must use one of the manual methods described previously to repark the call on an available SWCA key.

You can also configure the system to retain the call on the same SWCA key for the duration of the call, which is the period until someone hangs up, regardless of how many times the call is answered and reparked.

Answering a call with no SWCA keys available


If all your SWCA keys have assigned calls, and you receive another call, you can:

- put the call on Hold until a SWCA key becomes free. Do this by simply picking up the call. The first call automatically goes on Hold at your telephone.
- dial in a SWCA code that is not assigned to a button on your telephone. If you assign a call to a code that does not have an appearance on your telephone, you need to use the Page, Voice call, or Message feature to tell the group that there is a call waiting, and on which code it was parked.

Retrieving a call from a SWCA key



If the indicator beside a SWCA key is blinking, you can retrieve the call by picking up the handset and pressing the SWCA key associated with the indicator, or by dialing in the SWCA code that associates with that key.

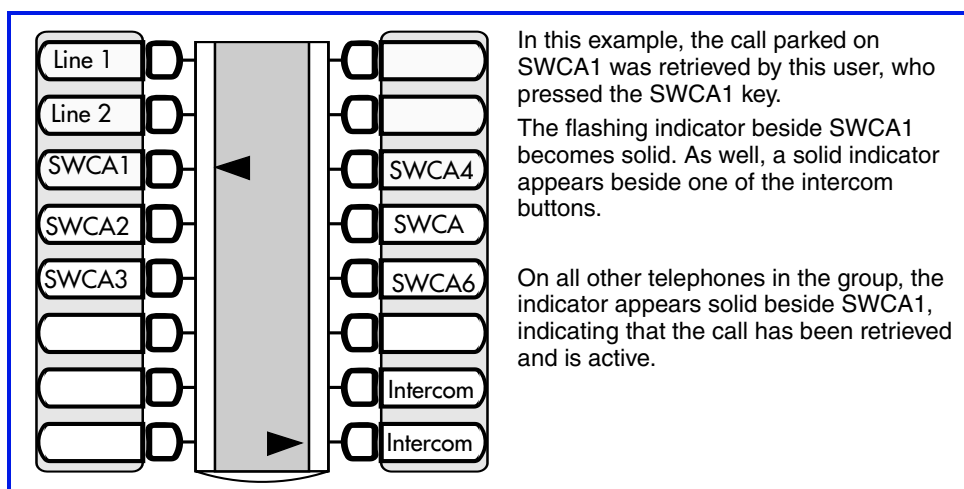

If you are not sure which call to pick up, you can use one of the following codes to find the longest-parked call or the most recently parked call:

- **FEATURE *537** retrieves the oldest SWCA call . The indicator on all telephones in the group becomes solid, indicating an active call.
- **FEATURE *538** retrieves the most recent SWCA call . The indicator on all telephones in the group becomes solid, indicating an active call.



Note: These codes only work for telephones that have SWCA keys defined, and the system only searches across the range of codes that are assigned for that telephone.

Other features that affect how you use SWCA

Timed-out SWCA calls

If a call remains parked and unanswered on a SWCA key for a preset period of time (the Call Park timeout timer), the call un parks from the SWCA key and rings again at the telephone at which it was last parked.

Outbound calls

You can also park out-dialed calls on a SWCA key. If your system is set up to automatically assign calls to a SWCA key, the call is assigned to a key as soon as it is answered. Otherwise, during your call, you can press an available SWCA key or **HOLD** to park the call on a SWCA key. The call becomes available to other users in the group and it frees up your intercom or line.

Auto-Hold **FEATURE 73**

Your telephone must be set to have Full Auto-Hold so that a call automatically gets placed on **HOLD** if you answer a second call. If your telephone does not have Auto Hold on, use **FEATURE 73** to change the setting. Note that to turn Full Autohold off, enter **FEATURE 73** again.

Transferring calls **FEATURE 70**

If you transfer a call to a telephone that does not have the same SWCA keys assigned, the call disappears from the SWCA key on your telephone when the call transfers. If the call needs to be reassigned to your group, the person who answered the call enters a SWCA control code that is assigned to your group. Doing so returns the call to a SWCA designation at your telephone.

Conference calls **FEATURE 3**

You cannot park a conference call on a SWCA key.

You cannot conference a call that is parked on a SWCA key.

To conference a call parked on a SWCA key:

- 1 Press the SWCA key to un park the call.
- 2 Press Hold.
- 3 Press   to create the conference.

If a conference call is created using two SWCA-associated calls on a set and a conference transfer occurs between the two dependent sets because the conference master set releases the call, then the single remaining call between the two dependent sets continues to be associated to the currently associated SWCA key (if any) on each dependent set. If a conference call is created from two SWCA-associated external calls, and then a transfer occurs by the conference master releasing the call, the remaining call between the lines or trunks is not associated with any SWCA key.